



Volta Flex, Dimensional Flexible Panels

Volta™ Flex is creative...classy... artistic... cool.

Now, it's flexible enough for your design concepts.

Marlite's Volta™ Flex artistic dimensional panels offer you infinite possibilities to complete your design vision for feature walls. Consistent, contiguous flowing patterns to create excitingly bold statements. Volta's line of decorative panels are "sculpture" for your walls! These decorative flexible panels are finished to meet your custom specifications.

Marlite Volta Flex are thermoplastic sheets with high impact resistance


and are available in 6 patterns and finishes. Applications include: Hospitality, Healthcare, Education, Offices, Lobbies and Retail Interiors. Sold as flat sheets or installed in Marlite Wall Systems.






Volta Flex panels

- Panel size: 48" X 96"
- Panel thickness:
Actual thickness varies
by pattern.
- Finish options: choose
from 6 standard finishes.
Custom finishes
available.

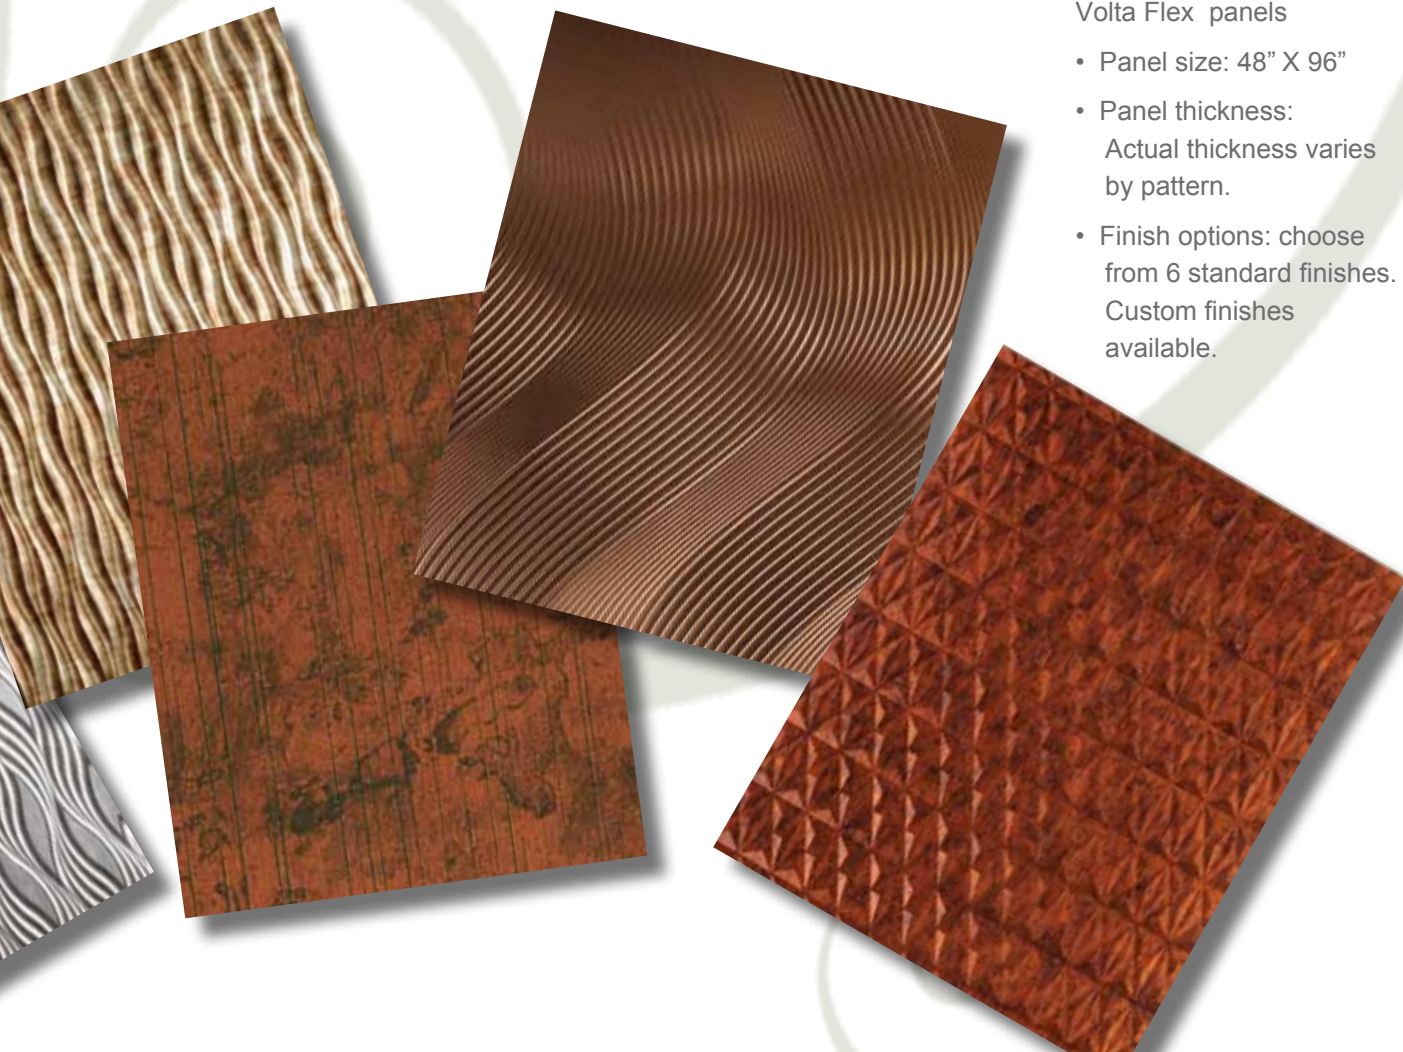


Pattern Selections

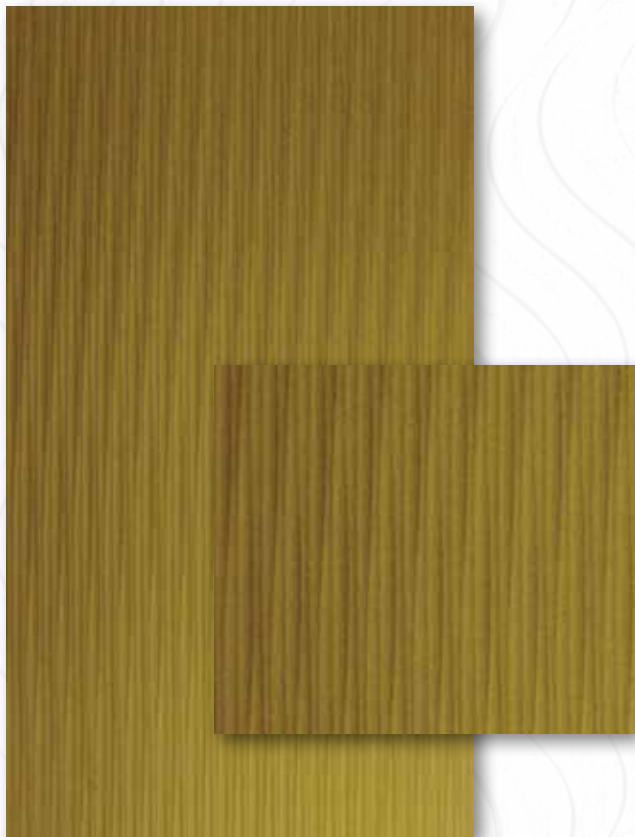

Tydel - F



Windswept - F

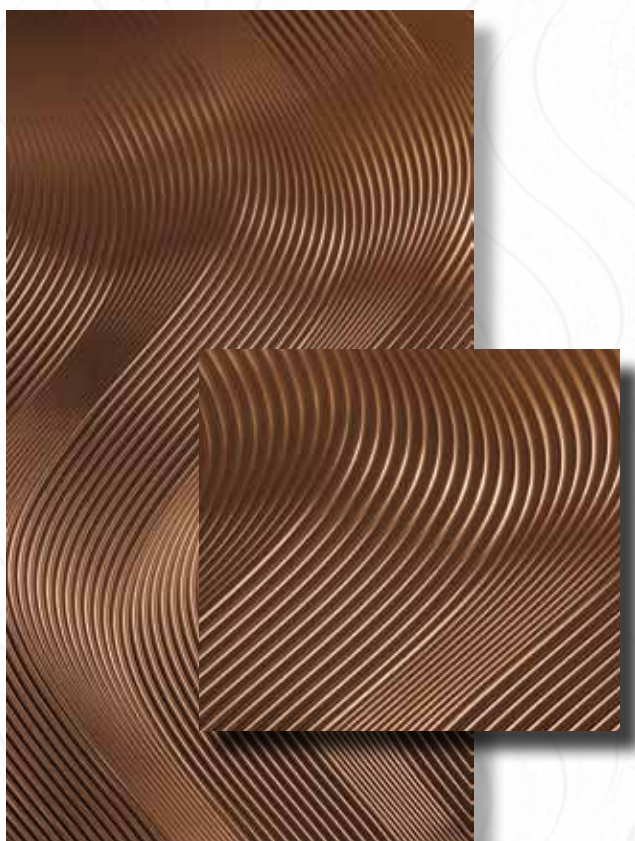


Vipera - F



Tangle - F



Cascade - F

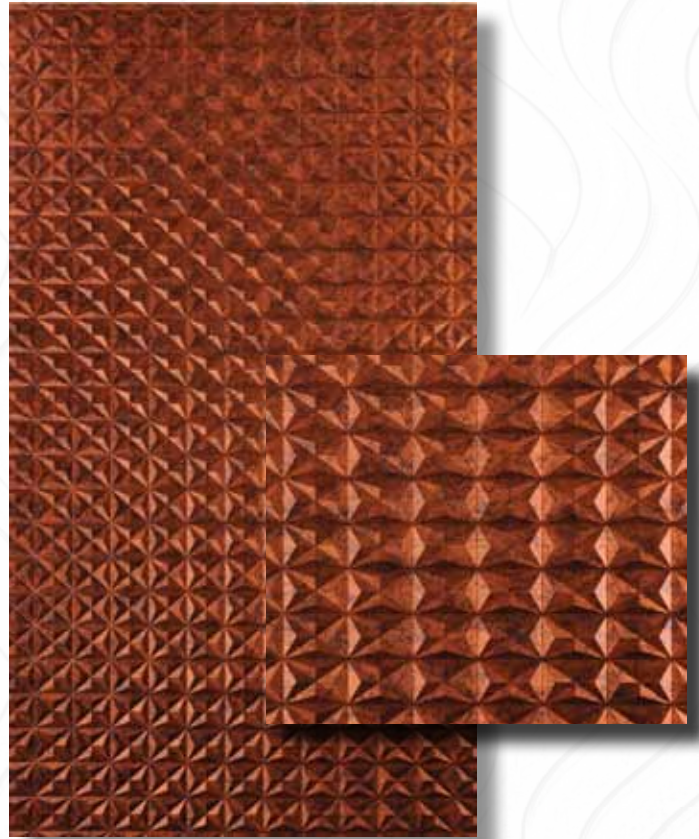

Facet - F

Volta Flex thermoplastic dimensional panels are flexible enough to be rolled for shipping yet completely rigid when laminated. Volta Flex has impact, chemical, abrasion, U.V., stain and fire resistant properties and are suitable as wall panels, retail displays, and many other design applications.

Volta Flex Panels;

- Uniquely beautiful
- Flexible enough for columns and radius walls
- Easy to install
- Wide finish range to meet designers' specification

Finish Selections



Bronze



Bermuda Bronze



Brushed Copper



Silver



Moonstone Copper



Oiled Bronze



As simple to install and maintain as it is beautiful.

Easy to Install

Volta Flex Panels are compatible with many different adhesives and installation methods. Fabrication and installation are both very easy with these products. Ask for installation instructions.

Lightweight 1/4 pound per square foot. Flexible Sheets can be rolled and boxed for shipment.

Fire Retardant, meets ASTM E 84 Class 1. Even though it is fire retardant, panels can be deformed with excessive heat. Never expose to over 140° F. Specific technical fire data is available upon request.

High Impact Resistant and Chemical Resistant. High impact, chemical and scratch resistant properties.

Made with pride in the USA and ISO Certified.

Cleaning & Care

Clean only with warm soapy water. Never use abrasive cleaners or anything with harsh chemicals.

Storage-Store flat and acclimatize in the same environment for at least 24 hours before fabrication. All products must be acclimatized for at least 24 hours prior to installation

Slight imperfections and color variations from sheet to sheet are possible and considered normal. Please inspect each sheet carefully before fabrication to insure it meets your needs.

Inside corners, outside corners and edge trim are available upon request.



Dover, Ohio 44622 • 800-377-1221 • www.marlite.com • info@marlite.com
Form No. DC56-07111 Effective Date 08/10/2011 Printed in U.S.A.

At Marlite, our commitment is to help protect our environment and sustain our resources, today and for generations to come.

 Printed on Recycled Paper